


Manuel d'utilisation

-Applique solaire avec détecteur-

INSTALLATION

1. Utiliser le modèle pour mesurer correctement la position des trous. Percer 3 trous de diamètre 6mm.
2. Fixer 3 chevilles expansives dans les trous.
3. Fixer 3 vis dans les chevilles
4. Insérer l'encoche au niveau de la vis du bas pour la bonne mise en place du luminaire
5. Appuyer sur le bouton au dos afin d'ajuster les différents modes

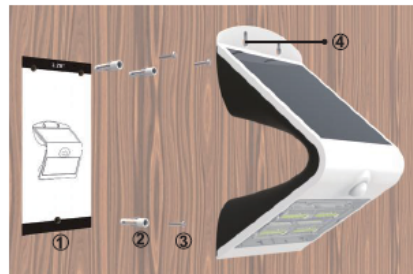

NOTICE

1. Ce produit est un luminaire solaire. Veuillez l'installer dans un endroit où la lumière du soleil est assez présente.
2. Veuillez noter que le temps d'éclairage dépend de la durée pendant laquelle le luminaire est resté exposé au soleil, et de la météo.
3. La lumière s'allumera automatiquement à la tombée de la nuit.
4. Le circuit intégré protège contre les surcharges, les décharges et les surtensions

PRÉCAUTIONS

1. Le luminaire est équipé d'une batterie au lithium, qui est remplaçable. Pour plus d'informations, contacter le vendeur pour une nouvelle batterie, 18650 2000mAh/3.7V.
2. Quand la batterie est remplacée, connecter les électrodes positive et négative correctement.
3. Si la batterie est enlevée et remise ou remplacée par une nouvelle, mettre le panneau solaire au soleil ou proche d'un fort éclairage pour activer le luminaire.
4. Ne pas démonter le produit si vous n'êtes pas un professionnel.
5. Ne pas se débarrasser de la batterie avec les déchets ménagers pour éviter tout risque d'explosion

SPÉCIFICATIONS

NOM	APPLIQUE SOLAIRE PAPILLON
PUISSANCE / LUMENS	3.2W / 400LM
LEDs	SMD2835*30PCS
BATTERIE LITHIUM	2000mAh/3.7V, 18650 REMPLAÇABLE
PANNEAU SOLAIRE	2.3Wp MONO-CRISTALLIN
MODES D'ÉCLAIRAGES	3 MODES
ANGLE/AIRE DE DÉTECTION	120° / < 6Mtr
DISTANCE VISIBLE	7Mtr
DEGRÉ DE PROTECTION	IP 55
GARANTIE	2 ANS (BATTERIE 12 MOIS)
DURÉE DE VIE	35.000H
HAUTEUR D'INSTALLATION	<4Mtr

CARACTÉRISTIQUES

-  ZERO COÛT ELECTRIQUE
-  ENERGIE SOLAIRE
-  DETECTION
-  ECLAIRAGE AUTOMATIQUE
-  EXTERIEUR
-  SANS CÂBLE

3 MODES

Appuyer sur le bouton pour ajuster les différents modes:

Appuyer 1 fois pour le mode A

Appuyer une seconde fois pour le mode B

Appuyer une troisième fois pour le mode C

Appuyer une quatrième fois pour éteindre.



Mode A

S'allume automatiquement à la tombée de la nuit (<30lux), reste allumé à 20%, pendant 5 heures avant de s'éteindre.


Mode B

S'allume automatiquement à pleine puissance (400lm) quand le luminaire détecte un mouvement dans un rayon de 6 mètres puis diminue sa luminosité à 3% pendant 20s quand il n'y a plus de mouvement.

Mode C

S'allume automatiquement à pleine puissance (400lm) quand un mouvement est détecté dans un rayon de 6 mètres puis s'éteint au bout de 30s s'il n'y a plus de mouvement

Installation

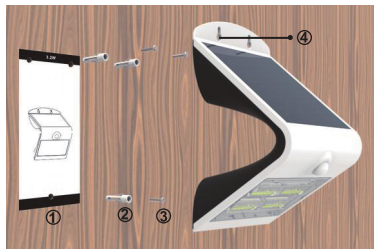

1. Please use the card to measure hole position correctly and drill 3 holes of $\Phi 6\text{mm}$.
2. Fix 3 expansion plugs into the holes.
3. Fix 3 screws into the expansion plugs with a spare space.
4. Insert the notch to the lower screw and fasten the whole lamp well.
5. Press the back button to adjust to the demanded working mode.

Notice

1. This is a solar powered lamp, please install it in a location where can get enough sunshine.
2. Please note the lighting time depends on sunshine duration & weather.
3. The lamp will light up automatically at dusk.
4. Built-in intelligent IC is with over-charge, over-discharge and over-voltage protection.

Warning

1. The lamp is equipped with an internal Li-ion battery, which is replaceable. If any need, please contact seller for new battery, 18650 2000mAh/3.7V.
2. When replacing the battery, please connect positive and negative electrode correctly.
3. If the battery is taken out and put back in or replaced with new ones, please toward the solar panel to sunshine or a strong light to activate the lamp.
4. Non-professionals please do not disassemble the lamp.
5. Please do not dispose the battery with household garbage to avoid explosion.

Specification

Product Name	Solar LED Wall Light-Butterfly
Power/Lumen	3.2W/400LM
LEDs	SMD2835*30PCS (Front 28PCS+Back 2PCS)
Li-ion Battery	2000mAh/3.7V, 18650 Replaceable
Solar Panel	2.3Wp, Mono-crystalline silicon
Working Mode	3 different lighting modes
Detection Angle/Area	120°/ $\leq 6\text{Mtr}$
Visible Distance	7Mtr
IP Degree	IP 55
Warranty	24 months (battery 12months warranty)
Lifespan	35,000hrs
Installation Height	$\leq 4\text{Mtr}$
Packing	Colorbox (1*Solar light, 1*Accessory bag, 1* User manual, 1*Measure card)

Features



ZERO Electricity Cost



Solar Powered



PIR Detective



Light on/off automatically



Outdoor



Cordless

Solar LED Wall Light with Sensor

User Manual





Front & Back light shining, beautiful as a "butterfly"!

REACH EN62471



Please read and follow all instructions to operate.
Save this manual for future reference.

3 Working Modes

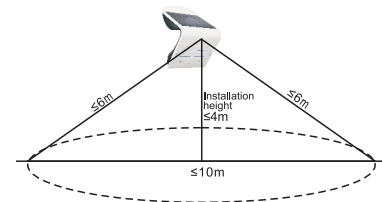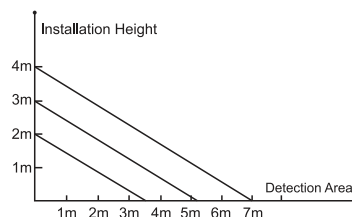

Pls press the Button to adjust to different working mode:

Press 1st time for Mode A. Press 2nd time for Mode B.
Press 3rd time for Mode C. Press 4th time for off.



Mode A: Automatically turns on at the dusk ($< 30\text{lux}$) and remains 20% bright, up to 5 hours after which it turns off.



Mode B: Automatically turns on to full brightness (400lm) when motion is detected in the range $\leq 6\text{mtr}$ and then turns to 3% brightness in 20 seconds of no motion.



Mode C: Automatically turns on to full brightness (400lm) when motion is detected in the range $\leq 6\text{mtr}$ and then turns off in 30 seconds of no motion.