








8172H
Material: Aluminum
Watt: 30W
Voltage: 220-240VAC 50/60HZ
Lumen: 7000LM
CCT: 4000K
Size: 105 x 77 x 28mm
Net Weight: 188.69g
Beam Angle: 100°





8173H
Material: Aluminum
Watt: 30W
Voltage: 220-240VAC 50/60HZ
Lumen: 7000LM
CCT: 4000K
Size: 134x89x34mm
Net Weight: 305.6g
Beam Angle: 100°




8174H
Material: Aluminum
Watt: 30W
Voltage: 220-240VAC 50/60HZ
Lumen: 7000LM
CCT: 4000K
Size: 174x126x37mm
Net Weight: 846g
Beam Angle: 100°



8175H
Material: Aluminum
Watt: 30W
Voltage: 220-240VAC 50/60HZ
Lumen: 7000LM
CCT: 4000K
Size: 174x126x45mm
Net Weight: 992.5g
Beam Angle: 100°



8176H
Material: Black / Turquoise
Výkon LED: 100W
Vstup napětí: 220-240VAC 50/60HZ
Svítivost: 7000LM
Barva světla: 4000K
Rozměr: 260x189x50mm
Váha: 1793.9g
Výstupový úhel: 100°
Index poleh: RA70



IMPORTANT USER ADVICE

This Product is Class I and must be Earthed.
Always switch off mains supply before fitting.
Replace any broken or damaged glass as soon as possible.
Ensure all seals are intact and operational after fitting or maintenance.
Do not touch the lamp in use or just after use as there is a risk of being burnt.
Do not cover it with paper or cloth.
Take off from flammable materials.
Do not wash the lamp.
Do not use the lamp where the ambient temperature is over 45 °C.
Keeping your eyes with a security distance, the light could cause damage.
This product has no user serviceable parts.
Clean with a damp cloth and dry with a lint free cloth or kitchen towel.

INSTALLATION

Find a suitable location to install this product.
Prepare the mains wiring.
Use the mounting bracket to mark the hole centres for fixing.
Drill holes suitable to accept wall plugs. Insert wall plugs.
Ensure mounting bracket.
Terminate wiring. Pay particular attention to any markings for Replace all covers.
Fit the floodlight to the mounting bracket with the screws.
Check seals, gaskets and cable gland operation before testing the luminaire.
Turn on power supply and test luminaire.

IMPORTANT INFORMATION

It is recommended that luminaires installed and fitted by a qualified electrician ensuring the installation complies to the current building regulations. These products are designed for connection to a 230VAC 50Hz supply.
Any broken or damaged parts should be replaced as soon as possible.
YUSING will not accept responsibility for any claims arising from a poor installation.

WIRE CONNECTION GUIDE

The brown wire is connected with the L wire of city electricity. The blue one is connected with the N wire of city electricity. The green/yellow one is connected with the earth wire. Power Cord type H05RN-F 3 x 1.0mm²





Diagram Showing



CORRECT DISPOSAL OF THE PRODUCTS:

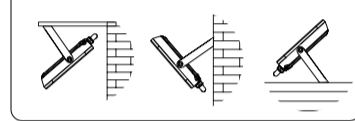

Within the European Union, this symbol indicates that the products must not be disposed in the household waste. Devices contain valuable recyclable materials that should be recycled for reuse and uncontrolled waste disposal may cause harm to the environment and human health.
Please dispose the old products via suitable collection systems or send the unit to the office where you bought it. This will make the product recycling.